

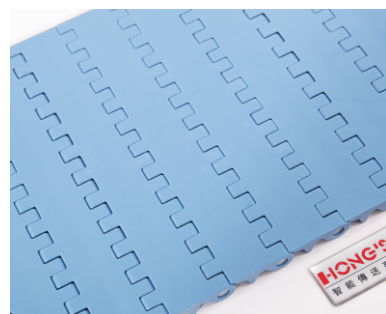


HS-200A-HD Technical Data Sheet

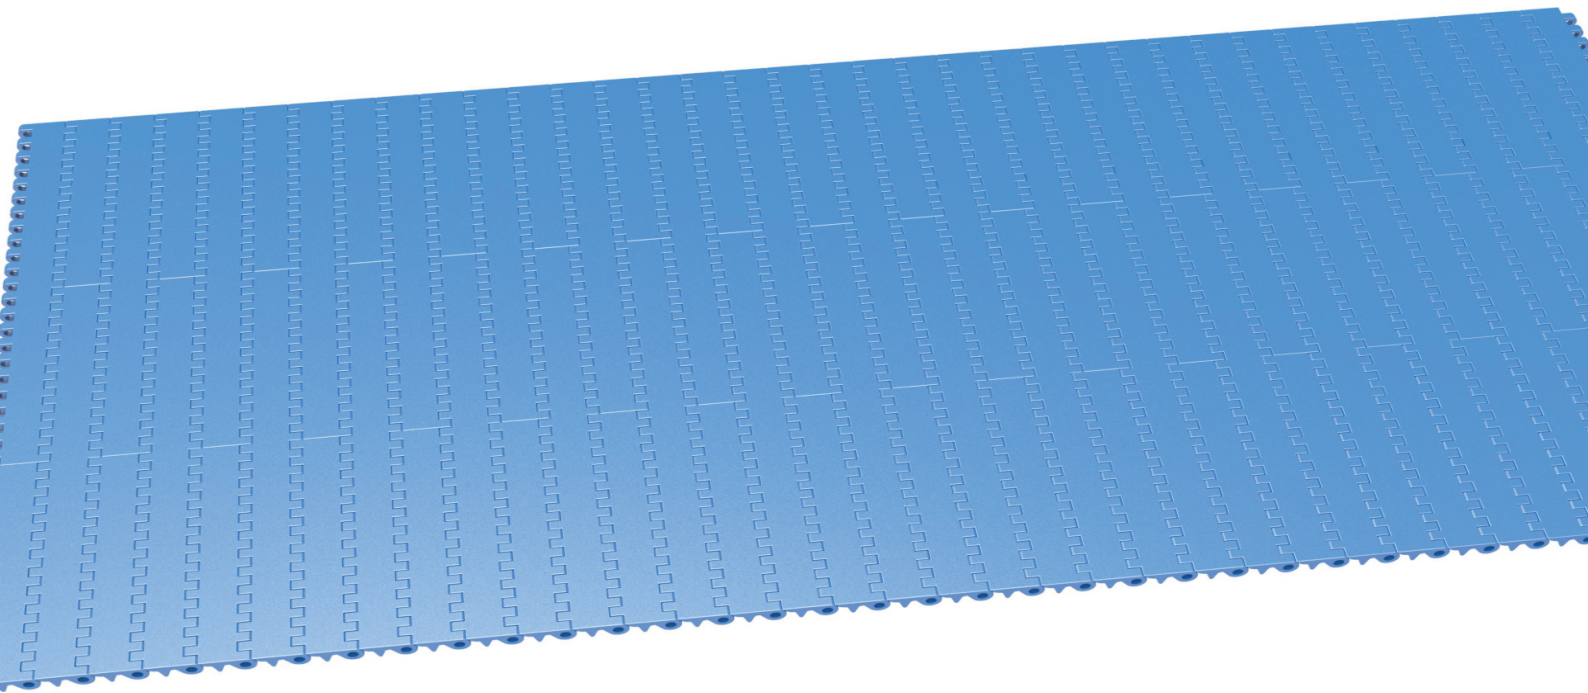

Pitch: 25.4mm
 Minimum Width: 152mm
 Open Area: 0%
 Approved: FDA
 Rod: Ø5.3mm
 Flight: Yes
 Side Guard: Yes
 Curve: No

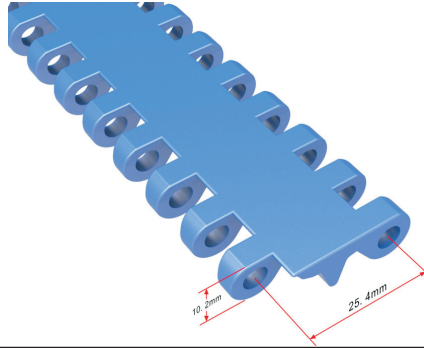

Data

Belt Material	Belt Strength		Curve	Temperature		Belt Weight
	Straight			°C (min.)	°C (max.)	(Kg/M ²)
	Kg/M(BW)	N/M(BW)				
Polypropylene	1155	11550	--	1	100	4.25
Polyethylene	1105	11050	--	−60	60	4.4
Acetal	1520	15200	--	−40	80	6.2
Nylon	1310	13100	--	1	180	5.4
BW – Belt Width						

Color Table

Polypropylene					Polyethylene					Acetal					Nylon				
W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B
●	●						●			●				●				●	

W-White, G-Gray, N-Nature, DB-Darkbrown, B-Blue

Friction Table


Belt Material	Friction Wear strips & Products							
	UHMW	HDPE	Steel	Glass	SUS	Plastic	Cardboard	Aluminum
Polypropylene	0.32	0.24	0.15	0.09	0.13	0.08	0.15	0.25
Polyethylene	0.13	0.11	0.26	0.19	0.31	0.16	0.21	0.41
Acetal	0.11	0.09	0.27	0.16	0.26	0.15	0.19	0.28
Nylon	0.18	0.13	0.25	0.16	0.26	0.16	0.19	0.27

SUS – Stainless Steel

Equivalent type with other Brand

Brand Name	Intralox	UNI	Rexnord	MCC	Habasit	KVP
Series & Type	1600	SNB	1000		M2400	610
	1650	CNB	1010		M2500	208CL
	200	OPB	7700		M2600	20835
	880/850	L-SNB	6390			13610


The above content is only for reference.

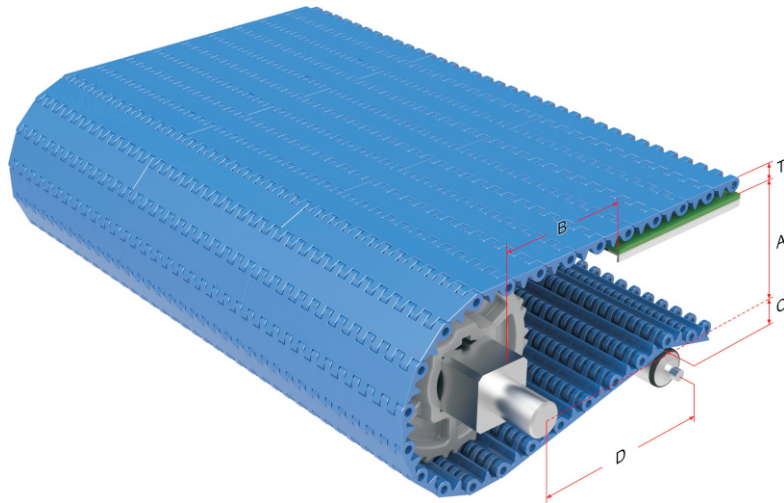

Conveyor Frame Dimensions

Unit : mm

No. Teeth	A (Min.)	B (Min.)	C (Max.)	D (Min.)	T
8	25.4	40.5	24.3	200	10.2
10	34.7	49.8	33.6	200	
12	42.1	57.2	41	200	
16	58.6	73.7	57.5	200	
20	74.9	90	73.8	200	

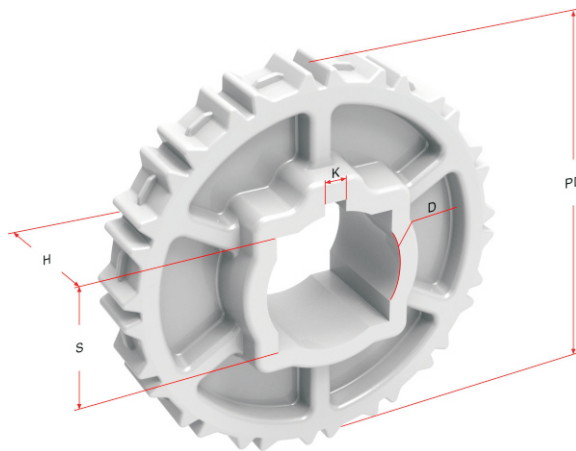

Sprocket Dimensions

Unit: mm

No. Teeth	PD	S	D	H	K
8	61	25.5	25.4/25.5/30.5	22	6X6
10	79.6	38.5/40.5	25.5/45.5	22	7X7
12	94.5	38.5/40.5	19/25.4/25.5/30.5/31.7/45.5	38	7X7
16	127.4	38.5/40.5	25.4/30.5/45.5	34	7X7
20	160	38.5/40.5	25.4/45.5	38	7X7