

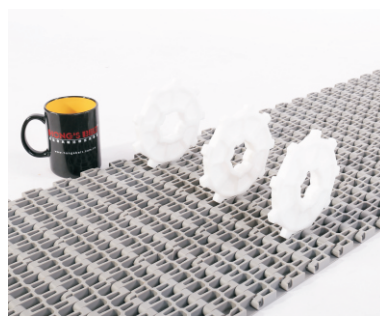
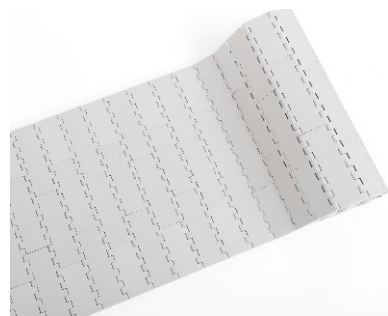


HS-900A Technical Data Sheet

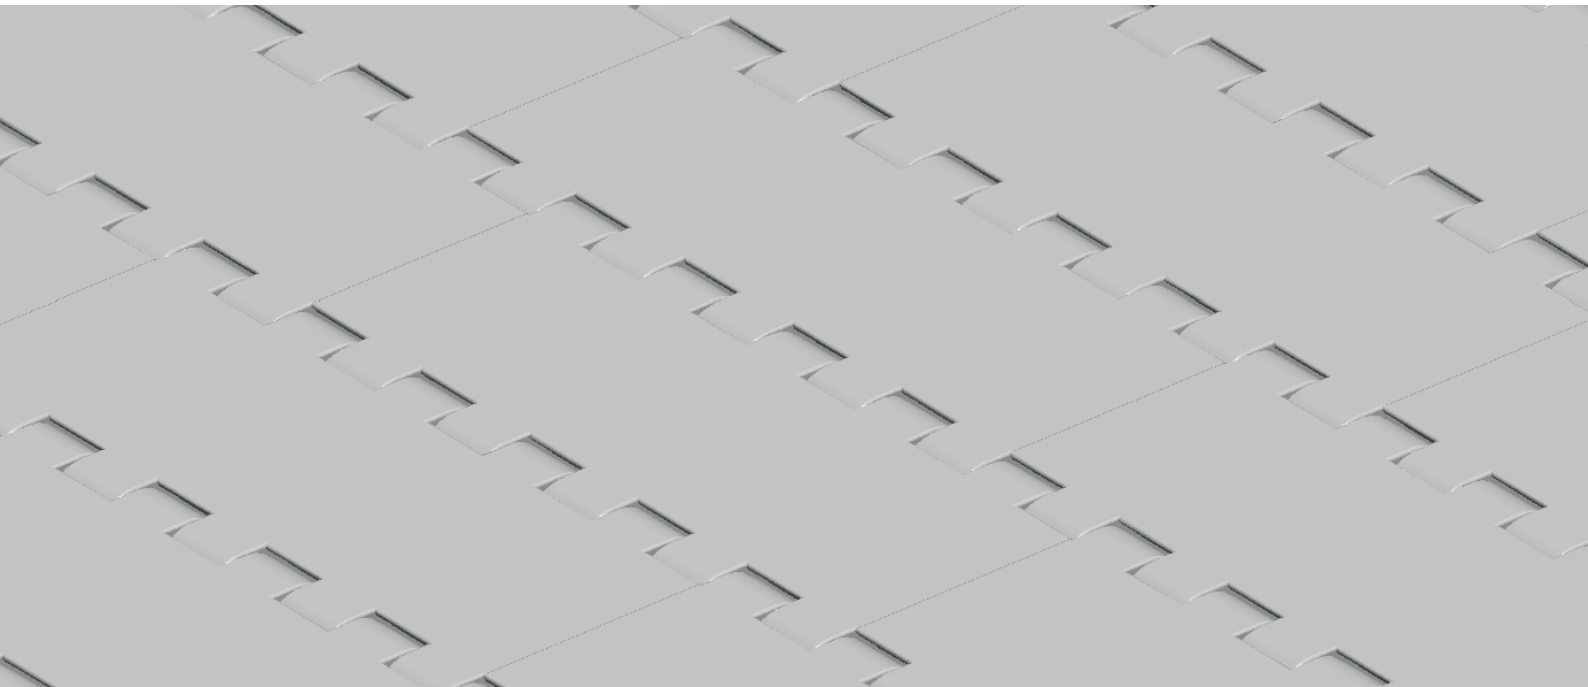

Pitch: 50.8mm
 Minimum Width: 150mm
 Open Area: 0%
 Approved: FDA
 Rod: Ø 5.8mm
 Flight: Yes
 Side Guard: Yes
 Curve: No

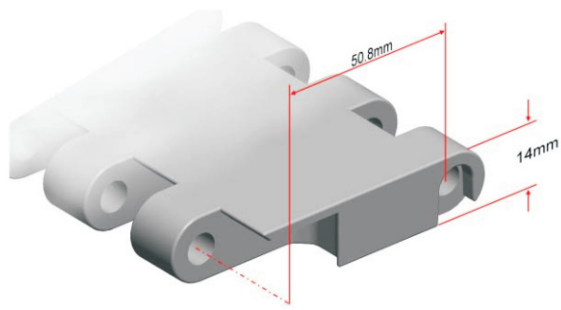

Data

Belt Material	Belt Strength		Curve	Temperature		Belt Weight
	Straight			°C (min.)	°C (max.)	(Kg/M ²)
	Kg/M(BW)	N/M(BW)				
Polypropylene	2745	27450	--	1	100	6.6
Polyethylene	2610	26100	--	-60	60	7.4
Acetal	3090	30900	--	-40	80	9.5
Nylon	2400	24000	--	1	180	8.5
BW – Belt Width						

Color Table

Polypropylene					Polyethylene					Acetal					Nylon				
W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B
●	●						●			●						●			

W-White, G-Gray, N-Nature, DB-Darkbrown, B-Blue

Friction Table


Belt Material	Friction Wear strips & Products							
	UHMW	HDPE	Steel	Glass	SUS	Plastic	Cardboard	Aluminum
Polypropylene	0.32	0.24	0.15	0.09	0.13	0.08	0.15	0.25
Polyethylene.	0.13	0.11	0.26	0.19	0.31	0.16	0.21	0.41
Acetal	0.11	0.09	0.27	0.16	0.26	0.15	0.19	0.28
Nylon	0.18	0.13	0.25	0.16	0.26	0.16	0.19	0.27

SUS – Stainless Steel

Equivalent type with other Brand

Brand Name	Intralox	UNI	Rexnord	MCC	Habasit	KVP
Series & Type	400	OPB	2000	2000	5000	620
	200	L-SNB	6390		5100	620ST
	800/850	MPB	2010			620IB
						620ST


The above content is only for reference.

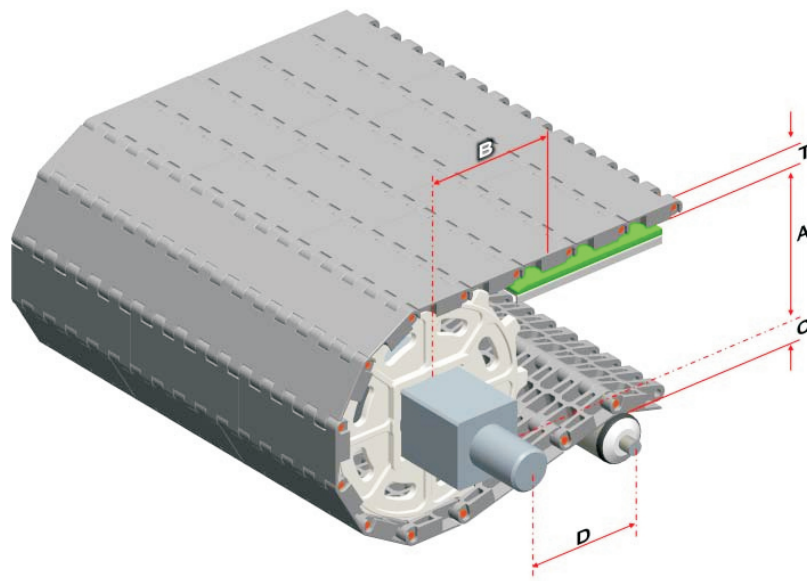

Conveyor Frame Dimensions

Unit : mm

No. Teeth	A (Min.)	B (Min.)	C (Max.)	D (Min.)	T
6	41	58	38	250	14
9	66.5	83.5	63.5	250	
12	90.75	107.75	87.75	300	

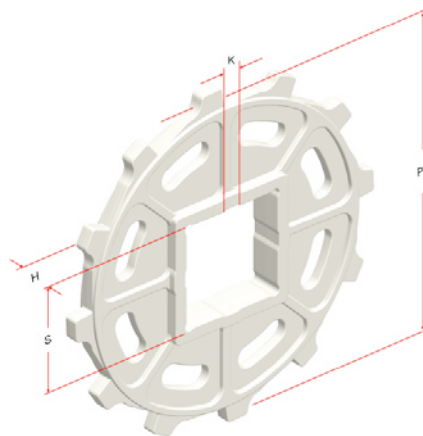

Sprocket Dimensions

Unit: mm

No. Teeth	PD	S	D	H	K
6	96	38.5/40.5	45.5/47.5	20	7X7
9	147	38.5/40.5/50.5	25.5/30.5/31.75/40.5/47.5/50.5	12	8X8
12	195.5	38.5/40.5/60.5/63.5	--	12	--