

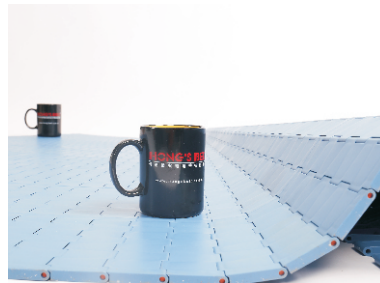
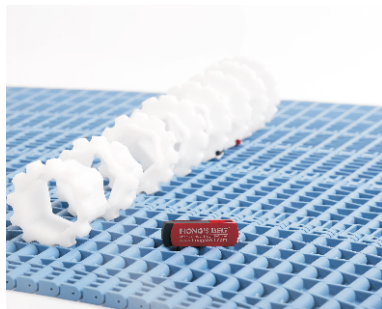
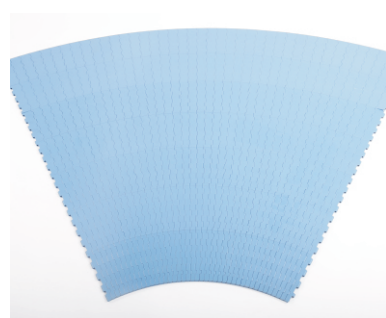


HS-2000A Technical Data Sheet

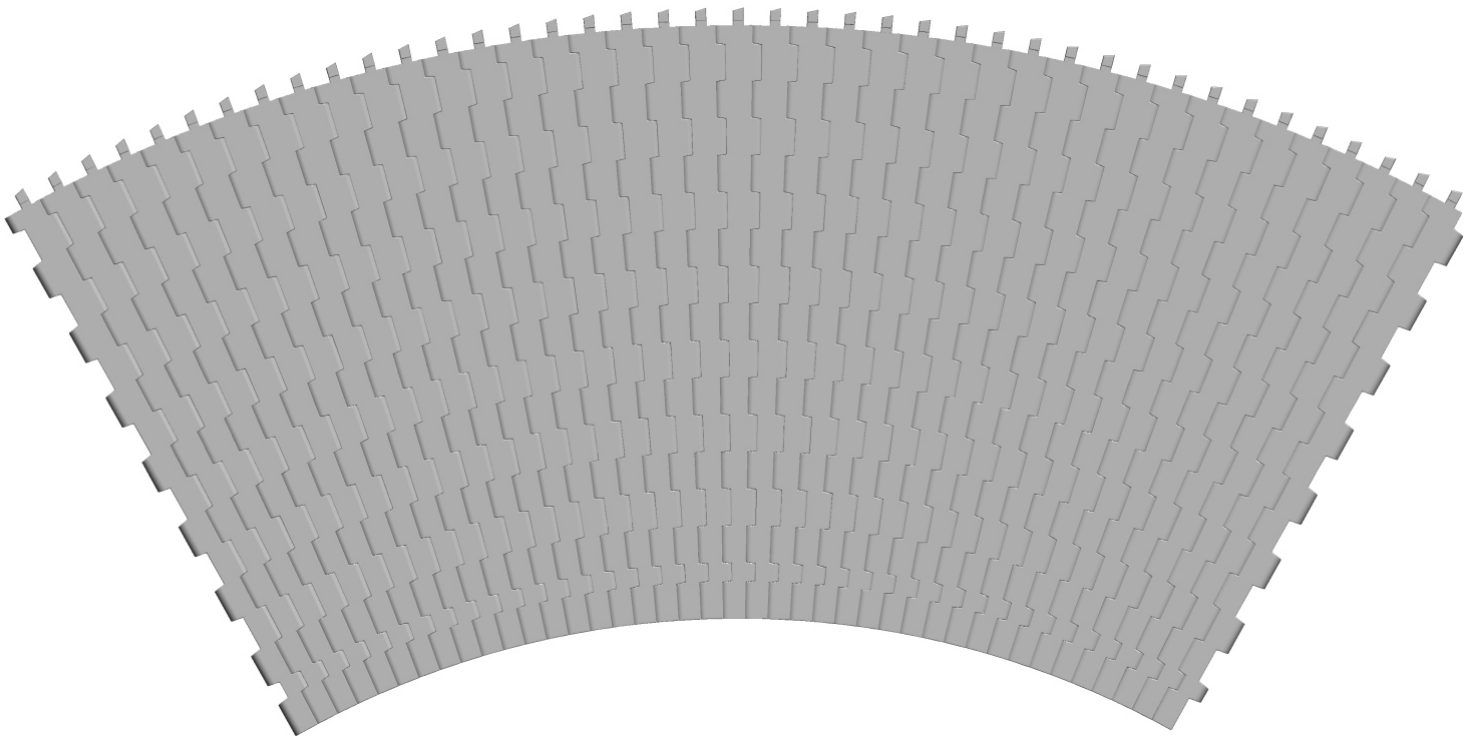

Fixed Radius: 600mm
 Minimum Width: 200mm
 Open Area: 0%
 Approved: FDA
 Rod: Ø 4.9mm
 Flight: No
 Side Guard: No
 Curve : Yes

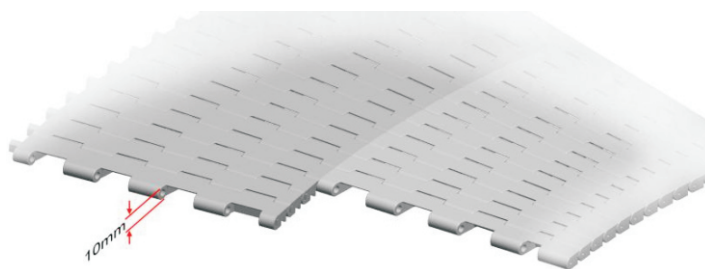

Data

Belt Material	Belt Strength		Temperature	
	Straight		℃ (min.)	℃ (max.)
	Kg/M(BW)	N/M(BW)		
Polypropylene	1600	16000	1	100
Polyethylene	1550	15500	-60	60
Acetal	2640	26400	-40	80
Nylon	2230	22300	1	180
BW – Belt Width				


Color Table

Polypropylene					Polyethylene					Acetal					Nylon				
W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B
●	●						●			●				●				●	

W-White,G-Gray,N-Nature,DB-Darkbrown, B-Blue

Friction Table


Belt Material	Friction Wear strips & Products							
	UHMW	HDPE	Steel	Glass	SUS	Plastic	Cardboard	Aluminum
Polypropylene	0.32	0.24	0.15	0.09	0.13	0.08	0.15	0.25
Polyethylene	0.13	0.11	0.26	0.19	0.31	0.16	0.21	0.41
Acetal	0.11	0.09	0.27	0.16	0.26	0.15	0.19	0.28
Nylon	0.18	0.13	0.25	0.16	0.26	0.16	0.19	0.27

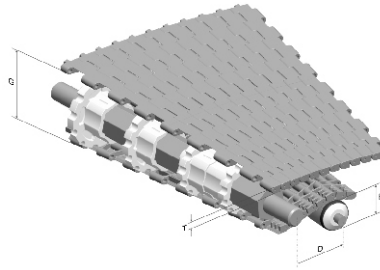

Conveyor Frame Dimensions

Unit : mm

No. Teeth	D (Min.)	E (Min.)	G	T
12	200	40	5.6°	10

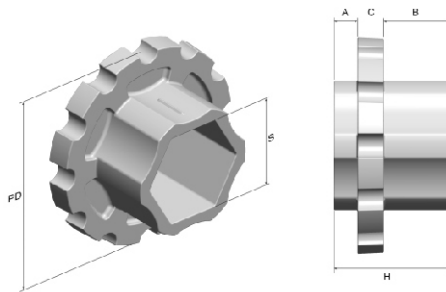


Sprocket Dimensions

Unit: mm

Belt Width	Sprocket No.	PD	S	A	B	C	H
200	1	65	41.5	35	0	11	46
	2	72		10	29		50
400	3	80.5		10	29		
	4	90		10	29		
600	5	100		10	29		
	6	110		10	29		
800	7	120		10	29		
	8	130		10	29		
1000	9	140		10	29		
	10	150		10	29		
1200	11	159		10	29		
	12	168		10	29		
1400	13	178		10	29		
	14	188		10	29		
1600	15	197		10	29		
	16	206		10	29		
1800	17	217		10	29		
	18	226		10	29		

Installation of sprockets

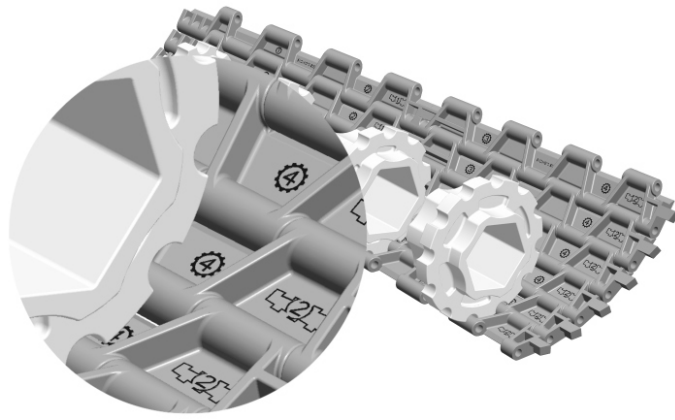

Please install the sprockets according to the graphical representation.

HS-2000A Flat Top Radius Modular Conveyor Belt

HS-2000 Flat Top Radius Modular Conveyor Belt is developed specially for logistics transportation by HONGSBELT.

The inside turning radius of HS-2000 is 600mm, it is fixed and doesn't change with the width change. Width of HS-2000 is range from 200mm to 1000mm (200mm, 400mm, 600mm, 800mm and 1000mm) Max width is 1000mm, which can meet the wide range of requirements of logistics transportation.

Driving Mode of HS-2000A

For turning conveyors installed with traditional PVC conveyor belt, the belt is fixed with unstable bearing parts, so the lift time of it is very short and the structure of the conveying machine is large; At the same time, the belt is drive by smooth roller, so it is easy to slip, which causes the low tension force and usually affects the production.

HS-2000A Flat Top Radius Modular Conveyor Belt is designed with module structure, and is drive by sprockets, which solve the slip of belt and ensure the belt in most stable condition in operation.

The bore of HS-2000 sprocket is 41.5mm hexagon, it can be matched with 41mm standard hexagonal shaft, so it is easy to get and process the raw material, more importantly, this design solves the chordal action of quadrilateral shaft and brings more stable operation.

Advantages of HS-2000A



HS-2000 Flat Top Radius Modular Conveyor Belt is stable in operation, and because of its fixed structure design, straight sections are not need in driving end, which save the manufacturing cost and the space of conveying system.

HS-2000 Flat Top Radius Modular Conveyor Belt is made from Acetal, it can endure instant impact with low friction coefficient and high impact resistance, tensile strength of it is 10 times stronger than common radius PVC Conveyor belt.


HS-2000 Flat Top Radius Modular Conveyor Belt is drive by sprockets, and can endure instant high-speed and big load capacity. It is widely used in Paper, Printing, Beverage, packaging industry etc. both for light-duty and heavy-duty conveying.

HS-2000 A Flat Top Radius Modular Conveyor Belt is drive by sprockets, and can endure instant high-speed and big load capacity. It is widely used in Paper, Printing, Beverage, packaging industry etc. both for light-duty and heavy-duty conveying.

Guide Rail & Wear Strips

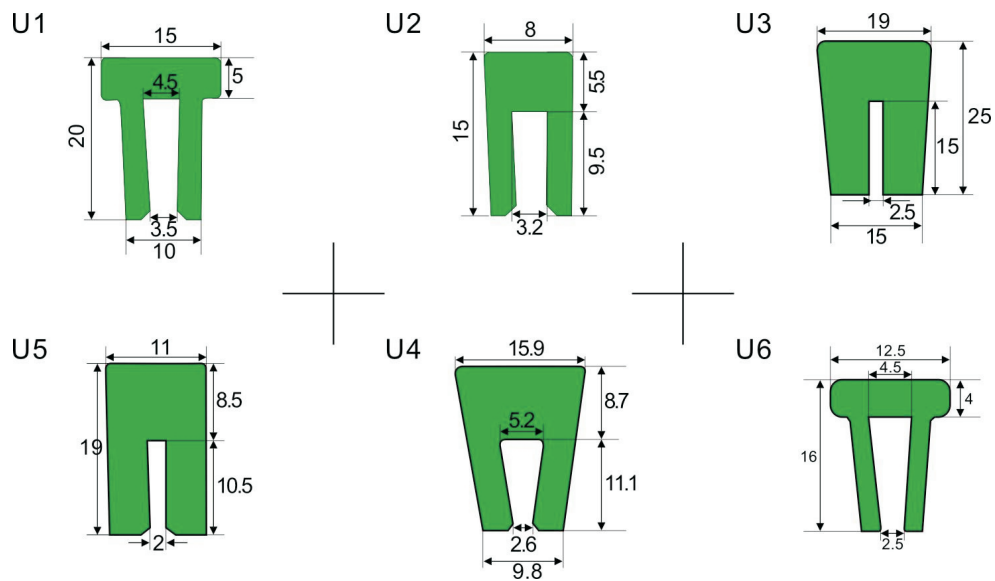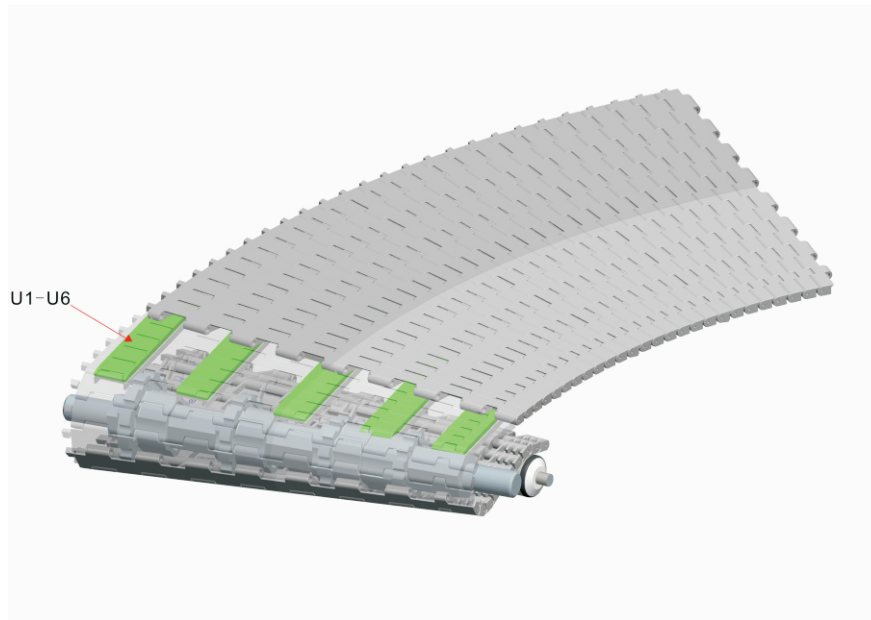

⌘ We have different kinds of guide rail and wear strips for your choice; for more information, please consult our sales team.

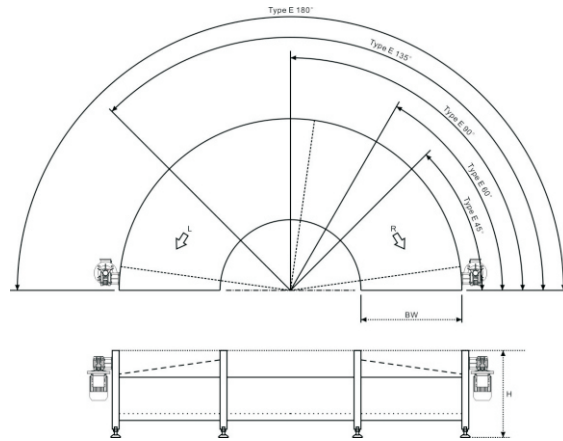

BW : 200mm 300mm 400mm 500mm 600mm 700mm 800mm 900mm 1000mm 1100mm 1200mm 1300mm
1400mm 1500mm 1600mm 1700mm 1800mm