

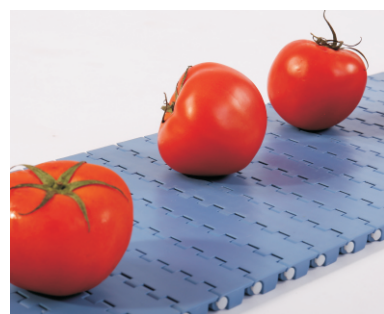
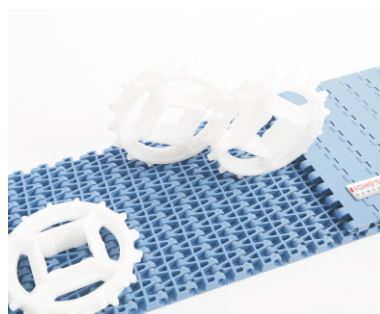


HS-2500A Technical Data Sheet

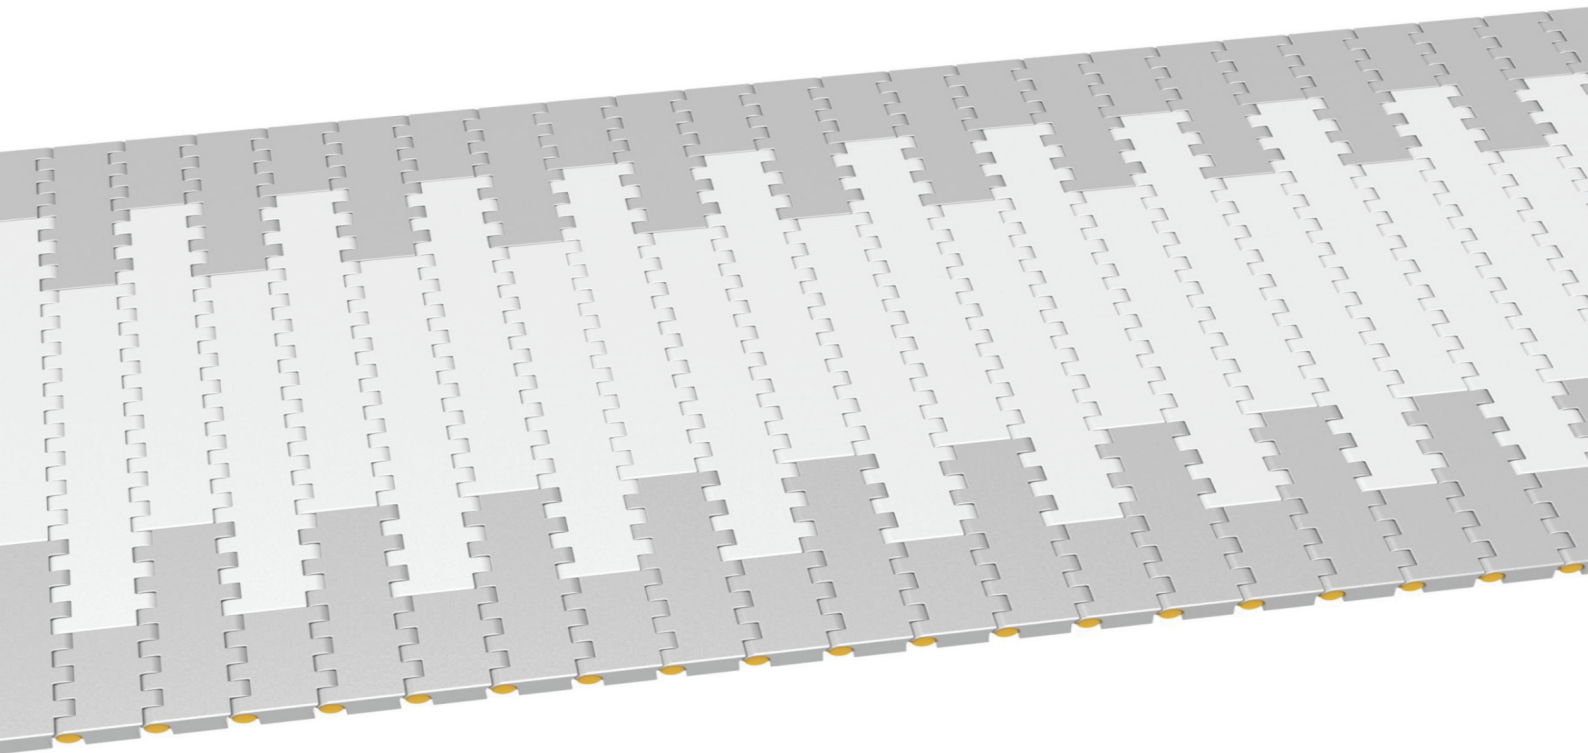

Pitch: 25.4mm
 Minimum Width: 200mm
 Open Area: 0%
 Approved: FDA
 Rod: Ø 4.9mm
 Flight: Yes
 Side Guard: Yes
 Curve : Non

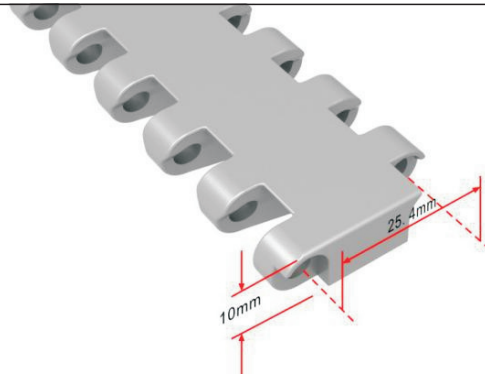

Data

Belt Material	Belt Strength Kg/M (BW)			Temperature		Belt Weight
	Straight		Curve	°C (min.)	°C (max.)	(Kg/M ²)
	Kg/M(BW)	N/M(BW)				
Polypropylene	1060	10600	--	1	110	5.8
Polyethylene	1030	10300	--	-60	60	6.1
Acetal	1720	17200	--	-40	85	8.8
Nylon	1520	15200	--	1	160	7.9
BW – Belt Width						

Color Table


Polypropylene					Polyethylene					Acetal					Nylon				
W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B
●	●						●			●				●				●	

W-White, G-Gray, N-Nature, DB-Dark brown, B-Blue

Friction Tables

Belt Material	Friction Wearstrips & Products							
	UHMW	HDPE	Steel	Glass	SUS	Plastic	Cardboard	Aluminum
Polypropylene	0.32	0.24	0.15	0.09	0.13	0.08	0.15	0.25
Polyethylene	0.13	0.11	0.26	0.19	0.31	0.16	0.21	0.41
Acetal	0.11	0.09	0.27	0.16	0.26	0.15	0.19	0.28
Nylon	0.18	0.13	0.25	0.16	0.26	0.16	0.19	0.27


SUS – Stainless Steel

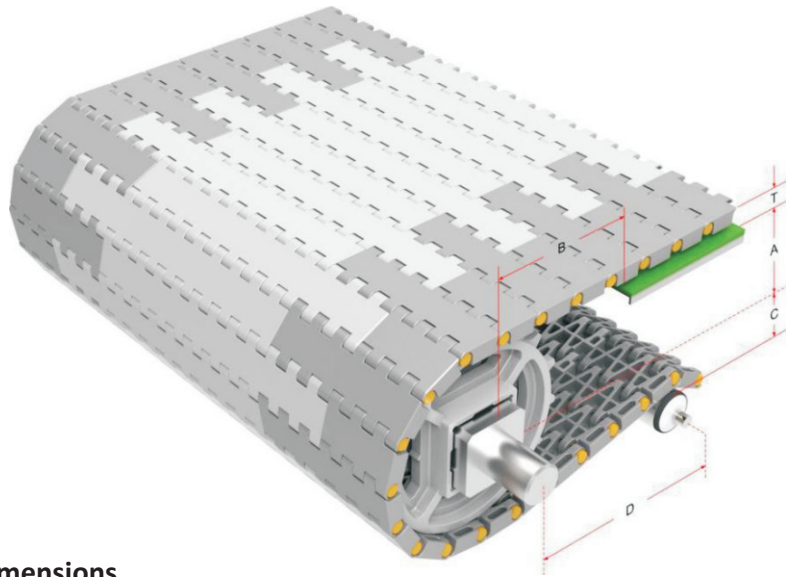

Conveyor Frame Dimensions

Unit : mm

No. Teeth	A (Min.)	B (Min.)	C (Max.)	D (Min.)	T
8-2R	27.8	42.8	26.8	200	10
10-2R	36.25	51.25	35.25	200	
12-2R	44.5	59.5	43.5	200	
15-2R	57	72	56	200	
18-2R	69.25	84.25	68.25	200	
20-2R / 20-2R-Split	77.25	92.25	76.25	200	

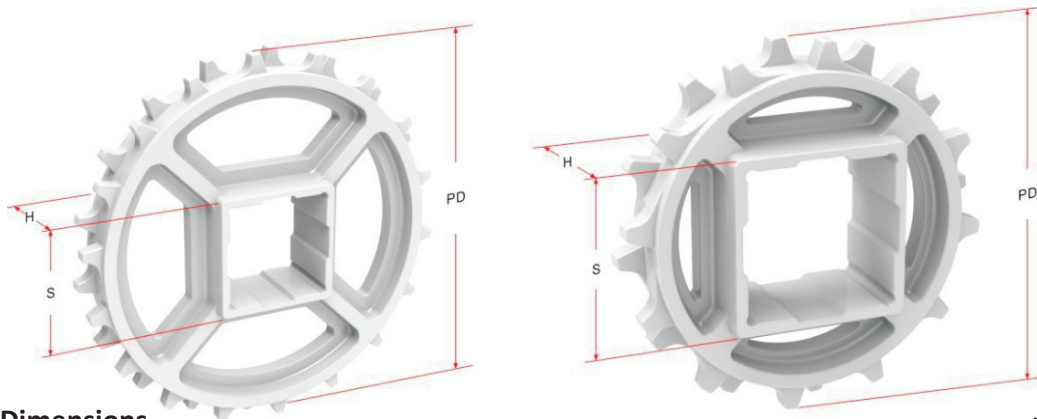

Sprocket Dimensions

Unit: mm

No. Teeth	PD	S	D	H	K
8-2R	65.6	--	30	30	8X8
10-2R	82.5	38.5/40.5	30.2	30	8X8
12-2R	99	38.5/40.5	25/25.4/30/32	20	7X7
15-2R	124	38.5/40.5	25.5/30/35.5	20	7X7
18-2R	148.5	38.5/40.5	25.5/30.5	20	8X8
20-2R	164.5	38.5/40.5/60.5/70.5	--	30	--
20-2R-Split	164.5	38.5/40.5/60.5	--	40	--